

内胀式快速封堵头

Internal Expanding Quick Sealing Connectors



CNH 系列 Series


【特点与功能】

Features and Functions

- 采用铝合金和工程塑料，结构轻巧
Made of aluminum alloy and engineering plastics, light structure
- 手柄可旋转，更易于操作
Easier to operate with rotating handle

CNH系列内胀式快速封堵头可用于各种管件的封堵连接。采用手柄操作，大大节省了正压/真空检漏、灌注、性能测试等封堵时间，重复性、密封性、形变量都经过严格检测，大大提高了封堵的可靠性。

CNH series internal expanding quick sealing connectors can be used for sealing connection of various pipe ports. The use of handle operation greatly saves the positive pressure/vacuum leak detection, perfusion, performance testing etc. sealing time. Its repeatability, sealing and shape changes have been strictly tested, greatly improve the reliability of sealing.

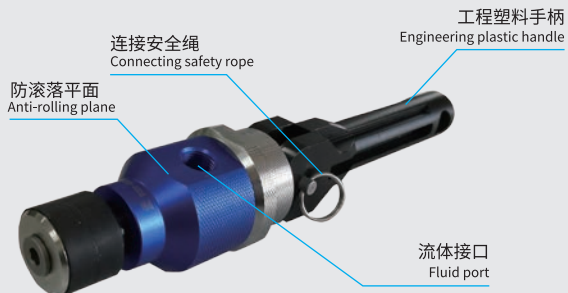


规格

Specifications

封堵压力 Sealing Pressure	-0.1 ~ 0.4 MPa
封堵对象 Sealing Object	无水无油，清洁干燥表面 No oil, no water, clean and dry surface
使用温度 Operation Temperature	-5 ~ 80°C
密封材质 Sealing Material	丁腈橡胶、聚氨酯橡胶（特殊材质可接受订做） Nitrile rubber, polyurethane rubber (the special material can be customized)
本体材质 Physical Material	铝合金+POM Aluminum alloy +POM

产品选型 Model selection

CNH-①-②③

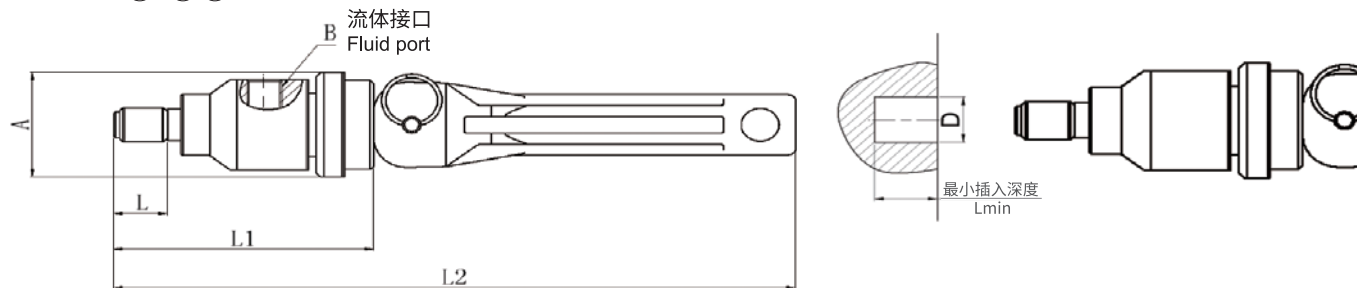

①外形尺寸 Outline dimensions

基础型号 Basic type	外形尺寸 Outline dimensions	尺寸 (mm) Size (mm)						流体口径 Fluid caliber
		①	A	B	L	L1	L2	
CNH	01	32.5	G1/8	14.55	70.25	184.25	φ1.8	
	02	35.8	G1/4	20.5	77.2	191.2	φ3	
	03	39.8	G1/4	24.5	82.2	196.2	φ4.8	
	04	46	G3/8	28.5	92.2	206.2	φ6	

③流体接口 Fluid port

基础型号-外形尺寸-封堵范围 Basic type-Outline dimensions- Sealing range	③流体接口 Fluid port	
CNH - ① - ②	N	无流体接口 Without fluid port
	P	带流体接口 With fluid port

备注: 1. 封堵范围在临界时, 推荐选择下一档(封堵范围较大)的产品。
If the sealing range is critical, the next one is recommended (the sealing range is larger).
2. 如有其它技术要求, 请与我司联系。
Please contact us if you have any technical requirements.

②封堵范围 Sealing range

基础型号-外形尺寸 Basic type- Outline dimensions	封堵范围 (mm) Sealing range (mm)		
CNH-①	②	D	最小插入深度 Lmin
CNH-01	01	φ11~φ12	15
	02	φ12~φ14	15
	03	φ14~φ16	15
CNH-02	04	φ16~φ18	21
	05	φ18~φ20	21
	06	φ20~φ22	21
	07	φ22~φ24	21
CNH-03	08	φ24~φ26	25
	09	φ26~φ28	25
	10	φ28~φ30	25
	11	φ31~φ32	25
CNH-04	12	φ32~φ34	29
	13	φ34~φ36	29
	14	φ36~φ38	29
	15	φ38~φ40	29

易损件清单 Quick-wear part list

封堵头型号 Model of sealing connectors	易损件名称 Name of quick-wear part	易损件型号 Model of quick- wearpart	单包数量(个) Quantity of single package(PCE)
CNH-01-01	φ10.6胶圈 φ10.6 Rubber ring	CNH-S100-05	5
CNH-01-02	φ11.6胶圈 φ11.6 Rubber ring	CNH-S110-05	5
CNH-01-03	φ13.6胶圈 φ13.6 Rubber ring	CNH-S130-05	5
CNH-02-04	φ15.6胶圈 φ15.6 Rubber ring	CNH-S150-10	10
CNH-02-05	φ17.6胶圈 φ17.6 Rubber ring	CNH-S170-10	10
CNH-02-06	φ19.6胶圈 φ19.6 Rubber ring	CNH-S190-10	10
CNH-02-07	φ21.6胶圈 φ21.6 Rubber ring	CNH-S210-10	10
CNH-03-08	φ23.6胶圈 φ23.6 Rubber ring	CNH-S230-10	10
CNH-03-09	φ25.6胶圈 φ25.6 Rubber ring	CNH-S250-10	10
CNH-03-10	φ27.6胶圈 φ27.6 Rubber ring	CNH-S270-10	10
CNH-03-11	φ29.6胶圈 φ29.6 Rubber ring	CNH-S290-10	10
CNH-04-12	φ31.6胶圈 φ31.6 Rubber ring	CNH-S310-15	15
CNH-04-13	φ33.6胶圈 φ33.6 Rubber ring	CNH-S330-15	15
CNH-04-14	φ35.6胶圈 φ35.6 Rubber ring	CNH-S350-15	15
CNH-04-15	φ37.6胶圈 φ37.6 Rubber ring	CNH-S370-15	15

主要产品 ● 气密检漏仪 ● 数字压力表 ● 流量计 ● 自动压力、流量控制器 ● 密封性能检测专用设备

 **天津博益气动股份有限公司**
TIANJIN BOYI PNEUMATICS CO., LTD.

公司·工厂: 天津开发区泰丰路80号 邮编: 300457
电话: (86)22-59810966 传真: (86)22-59810963
营销中心: 北京市丰台区角门18号名流未来大厦801-805室 邮编: 100068
电话: (86)10-87582461 传真: (86)10-87582462
网址: www.boyiqd.com 邮箱: sales@boyiqd.com

公司在深圳、顺德、杭州、上海、苏州、长沙、武汉、重庆、西安、青岛、沈阳设有分支机构。



代理经销商

C-BY-0000CNH-X-07
Printed in China